WO9418801

Publication Title:

COLOR WIDE DYNAMIC RANGE CAMERA USING A CHARGE COUPLED DEVICE WITH MOSAIC FILTER

Abstract:

The apparatus (10) is a color wide dynamic range apparatus which includes a filter (12) interposed immediately in front of reoccurring color elements so that each pixel represents a given color element for the scene. At least two exposure levels are taken of the scene and the pixel outputs are decoded to generate the video luminance and chrominance signals. The images of the at least two exposure levels are combined to form a final image.
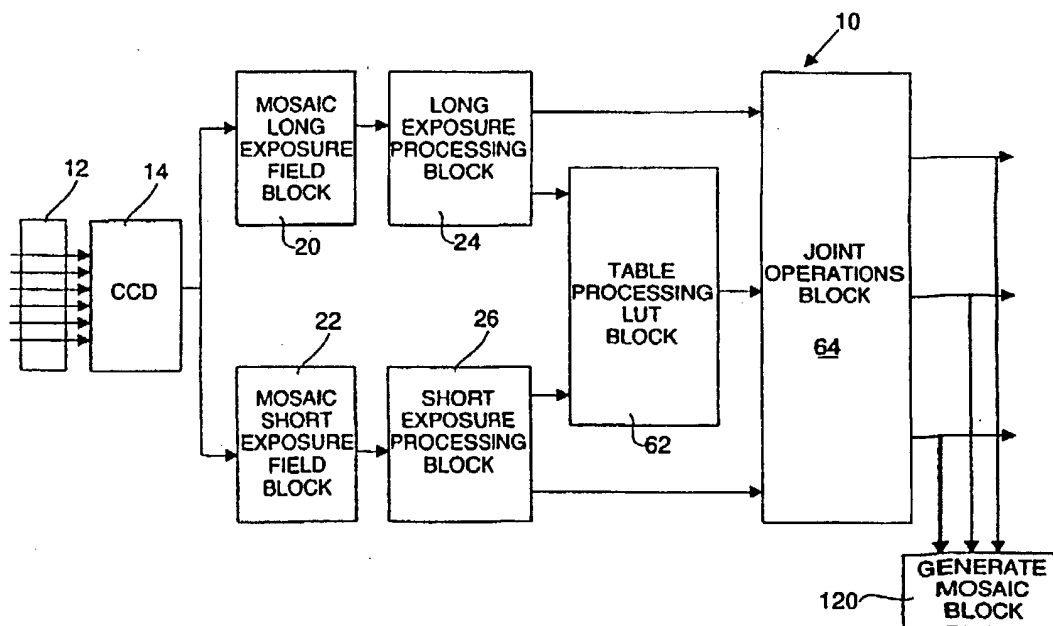

Data supplied from the esp@cenet database - http://ep.espacenet.com

(54) Title: COLOR WIDE DYNAMIC RANGE CAMERA USING A CHARGE COUPLED DEVICE WITH MOSAIC FILTER

(57) Abstract

The apparatus (10) is a color wide dynamic range apparatus which includes a filter (12) interposed immediately in front of reoccurring color elements so that each pixel represents a given color element for the scene. At least two exposure levels are taken of the scene and the pixel outputs are decoded to generate the video luminance and chrominance signals. The images of the at least two exposure levels are combined to form a final image.

COLOR WIDE DYNAMIC RANGE CAMERA
USING A CHARGE COUPLED DEVICE WITH MOSAIC FILTER

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of U.S. patent application Serial No. 07/795,350 filed November 20, 1991 entitled "Color Wide Dynamic Range Camera", which is,

5   in turn, a continuation-in-part of U.S. patent application Serial No. 07/388,547, filed August 23, 1989, now U.S. Patent No. 5,114,442. Additionally, this application is related to U.S. Patent No. 4,858,014 and currently pending U.S. patent application Serial No. 07/805,512, filed

10   December 11, 1991. The disclosures of all of the above-identified U.S. patents and patent applications are incorporated herein by reference.

BACKGROUND OF THE INVENTION

15   ### Field of the Invention

This invention pertains to video imagery and more particularly to apparatuses and techniques for providing enhancement of video color images. In particular, the present invention uses a four-color mosaic filter with a

20   single chip CCD in conjunction with color wide dynamic range algorithms. It is also applicable, however, to other types of mosaic filters known in the art.

SUBSTITUTE SHEET (RULE 26)

2

Description of the Prior Art

Various types of video enhancement apparatuses and techniques have been proposed. Prior implementations of color wide dynamic range cameras, such as those disclosed in the above-identified parent applications hereto, have used a plurality of CCD chips to generate the image data for subsequent processing. The use of multiple CCD chips, however, adds to the complexity and cost of the instrument. Moreover, current consumer video cameras, i.e., camcorders, almost universally use a single CCD chip. Therefore, a single CCD implementation is required to use dynamic range enhancement algorithms in a camcorder. Single CCD chip implementations are similarly preferred for endoscopic applications.

OBJECTS AND SUMMARY OF THE INVENTION

It is therefore an object of this invention to provide a color wide dynamic range camera implemented with a single CCD chip.

It is also an object of this invention to provide a color wide dynamic range camera which is adapted for use with a camcorder.

It is a further object of this invention to provide a color wide dynamic range camera which is adapted for use with a conventional endoscope.

These and other objects of the invention will be more apparent from the discussion below.

SUMMARY OF THE INVENTION

There is thus provided in accordance with the preferred embodiment of the present invention, video imaging apparatus including means for providing a plurality of video color images of a scene at different exposure levels using a single CCD chip, each color image being separated into several (e.g., four in the preferred

3

embodiment) different components prior to sensing by the CCD chip by way of a multiple color mosaic filter in front of the CCD chip. The pixel outputs are then decoded -- subjected to specific mathematical operations by the

5   processing electronics following the CCD output -- to generate the video luminance and chrominance signals.

The present invention integrates the digital processing of the mosaic color CCD data with ADAPTIVE SENSITIVITY™ dynamic range enhancement. This integration

10   provides for a substantial savings in total system processing hardware chip count and cost. It also permits better control of the color and detail production of the camera's video output. The mosaic storage format also provides for a unique video image compression technique.

15

BRIEF DESCRIPTION OF THE DRAWINGS

Further objects and advantages of the invention will become apparent from the following description and claims, and from the accompanying drawings, wherein:

20   Figure 1 is a general block diagram of the present invention.

Figure 2 is a representative illustration of the data image elements, with the size of the data image elements exaggerated.

25   Figure 3 is a general block diagram of the long and short processing of the present invention.

Figure 4 is a block diagram of the color path of the present invention.

Figure 5 is a block diagram of the intensity path of

30   the present invention.

Figure 6 is a block diagram of the look-up table processing of the present invention.

Figure 7 is a block diagram of the joint operations of the present invention.

4

Figure 8 is a block diagram of the differential color, intensity result block of the present invention.

Figure 9 is a block diagram of the color suppression factor block of the present invention.

5   Figure 10 is a block diagram of the color conversion block of the present invention.

Figure 11 is a block diagram of the mosaic generation block of the present invention.

10   DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings in detail wherein like numerals indicate like elements throughout the several views, one sees that Figure 1 is a block diagram of the apparatus 10 of the present invention.

15   Apparatus 10 includes a mosaic filter 12 which is bonded to the front of CCD 14 (preferably a single chip), generally as part of the CCD integrated circuit manufacturing process.

The alternating mosaic filter elements are cyan, 20   magenta, yellow and green (wherein C 'cyan' = G 'green' + B 'blue'; M 'magenta' = R 'red' + B; and Ye 'yellow' = R+G). When the CCD 14 charge output is read out, the photoelectric charges from vertically adjacent sensor elements of CCD 14 are combined in the analog shift 25   register (not shown). The on-chip addition gives rise to α, β, γ and δ elements as described below and as described in the Sony CCD 1992 Data Book (Sony part number ICX038AK), as well as earlier editions.

As shown in Figure 2, the mosaic complementary 30   additive color image comprises alternating first and second rows of image data elements 18_A — 18_D wherein first rows include alternating α and γ data elements (18_A and 18_B, respectively), and wherein the second rows include alternating β and δ data elements (18_C and 18_D, 35   respectively).

SUBSTITUTE SHEET (RULE 26)

5

The α image data elements 18_A are an equal mixture of cyan plus green (i.e., C + G = B 'blue' + 2G 'green'). The γ image data elements 18_B are an equal mixture of magenta plus yellow (i.e., M + Ye = 2R 'red' + B + G). Similarly, the β image data elements 18_C are an equal mixture of cyan plus magenta (i.e., C + M = 2B + G + R) and the δ image data elements 18_D are an equal mixture of green plus yellow (i.e., G + Ye = 2G + R).

Those skilled in the art will recognize that:

$$Y \text{ (i.e., intensity)} = \frac{\alpha + \gamma}{2} = \frac{\beta + \delta}{2}$$

from which the definition of intensity (Y) in the red, green, blue (RGB) system may be derived:

$$Y = R + 1.5G + B$$

Of course, those skilled in the art will realize that other color combinations are equally applicable. Each mosaic element of filter 12 covers the sum of two adjacent pixel sensors of CCD 14 so that each pixel output of CCD 14 is representative of one of the above color combinations given for the various image data elements 18. Four different monochromatic images, each representative of one color combination chosen from the colors of image data elements 18_A - 18_D of a given scene, are therefore generated by CCD 14.

As can be further seen from Figure 1, apparatus 10 includes four major functions as summarized below:

1. Long/short exposure processing:
    The first stages of the algorithm are performed on the two exposures (long/short) separately. The processing of each exposure is divided into two paths:
    a. Color path processing – evaluates color component for each pixel.

    b. Intensity (Y) path processing – handles intensity information for each pixel. This includes point ("DC") intensity and edge information.

6

2. Point processing:

    Each of the long/short exposure length processing
    functions (typically implemented on separate chips)
    outputs its point intensity information, obtained from
5   the Y path processing, to four look-up tables (LUTs).
    These tables determine the point intensity result of
    the two exposures, the normalized color weighting or
    color selection function and the saturation color
    suppression factor. This information serves the joint
10 operation processing stage. The four LUTs are
    programmable, thus enabling operation with different
    functions when necessary. In an alternative embodi-
    ment, these LUTs may be replaced by a programmable,
    piecewise linear (PWL) or other digital function
15 generator.

3. Joint operations processing:

    Joint operations processing joins results produced by
    the long and short processing blocks, and results
    obtained from the functions implemented in the table
20 processing LUTs, and evaluates the final output of the
    algorithm. The processing is divided into:

    a. Color components and Y result calculation —
        evaluates the final result of the color
        components and the intensity of each pixel.
25

    b. Color suppression factor calculation — evaluates
        the color suppression factor for each pixel,
        based on both edges and saturation information.

30 c. Color conversion processing — converts mosaic
        differential color space to RGB color space and
        produces RGB and Y/Cr/Cb outputs for each pixel.

4. Generate mosaic processing.

    Generate Mosaic processing converts RGB color space
35 back to mosaic color space for each pixel. The mosaic
    information generated enables economical hardware
    storage of processed images. This information can be
    retrieved and replayed through the algorithm — in

7

Replay Mode — to produce RGB or Y/Cr/Cb output of the stored result.

Referring now to Figure 1, similar to U.S. Patent No. 5,144,442 and parent U.S. patent application Serial No. 07/795,350 (the disclosures of which, again, along with U.S. patent application Serial No. 07/805,512 and U.S. Patent No. 4,858,014 are incorporated herein by reference), apparatus 10 includes long/short processing as implemented by mosaic long exposure field block 20 and mosaic short exposure field block 22 which obtain, respectively, a long and a short exposure from CCD 14 in order to allow subsequent processing by long exposure processing block 24 and short exposure processing block 26. The terms "long" and "short" exposures are used here generally to denote two image inputs to apparatus 10. In general, "long" is used to mean an input with a higher exposure level, and "short", a lower exposure level. The higher exposure may be generated in several ways, including longer integration time, typically obtained by controlling the "electronic shutter" of the CCD chip; higher gain in the analog amplifiers preceding digitization; or a larger mechanical iris opening or other external gating means.

These two image inputs are usually generated by a single CCD chip, but may also be generated simultaneously by two separate, boresighted CCD chips, as disclosed in the aforementioned earlier applications. For the more common case in which the two inputs are generated by a single CCD chip, they may be generated either sequentially (as in the case of the first method above — integration time control) or concurrently (by using two input channels with different gain levels). When a sequential method is used, field memories are required at the input to apparatus 10 (in blocks 20 and 22) to synchronize the data coming from the two sequential fields or frames. These memories are not needed in concurrent modes, except for purposes of

8

"freezing" the image for electronic, digital storage.
Switching logic incorporated in blocks 20 and 22 controls
the data flow into and out of these field memories,
depending on which mode (sequential or concurrent) is used.

5   Of course, this implementation could be expanded to more
than two exposure levels. Blocks 24 and 26 may typically
be provided on separate processing chips or incorporated
together in a single chip. The processing for each
exposure is divided into two paths:

10   1.   Color path processing — handles color information
                  for each pixel (see color path block 28 in Figure
                  3 and, in more detail, in Figure 4); and
            2.   Intensity (Y) path processing — handles intensity
                  information for each pixel (see Y path block 30
15   in Figure 3 and, in more detail, in Figure 5).

       Additionally, as shown in more detail in Figure 3,
long/short exposure processing blocks 24, 26 include mosaic
white balance block 32.

       Mosaic white balance block 32 receives the following

20   field of information from long/short exposure field blocks
       20, 22:

$$\alpha \; \gamma \; \alpha \; \gamma \; \alpha \; \gamma \; \ldots$$
$$\beta \; \delta \; \beta \; \delta \; \beta \; \delta \; \ldots$$
$$\alpha \; \gamma \; \alpha \; \gamma \; \alpha \; \gamma \; \ldots$$

25
$$\beta \; \delta \; \beta \; \delta \; \beta \; \delta \; \ldots$$
$$\alpha \; \gamma \; \alpha \; \gamma \; \alpha \; \gamma \; \ldots$$
$$\beta \; \delta \; \beta \; \delta \; \beta \; \delta \; \ldots$$

                                    . . .

                                    . . .

30   . . .

       That is, the information from CCD 14 with the mosaic
data order intact is received.

       After processing, the mosaic white balance block 32
outputs color-corrected data values:

9

$$\alpha_{wb} \quad \gamma_{wb} \quad \alpha_{wb} \quad \gamma_{wb} \quad \alpha_{wb} \quad \gamma_{wb} \quad \cdots$$

$$\beta_{wb} \quad \delta_{wb} \quad \beta_{wb} \quad \delta_{wb} \quad \beta_{wb} \quad \delta_{wb} \quad \cdots$$

$$\alpha_{wb} \quad \gamma_{wb} \quad \alpha_{wb} \quad \gamma_{wb} \quad \alpha_{wb} \quad \gamma_{wb} \quad \cdots$$

$$\beta_{wb} \quad \delta_{wb} \quad \beta_{wb} \quad \delta_{wb} \quad \beta_{wb} \quad \delta_{wb} \quad \cdots$$

5

$$\alpha_{wb} \quad \gamma_{wb} \quad \alpha_{wb} \quad \gamma_{wb} \quad \alpha_{wb} \quad \gamma_{wb} \quad \cdots$$

$$\beta_{wb} \quad \delta_{wb} \quad \beta_{wb} \quad \delta_{wb} \quad \beta_{wb} \quad \delta_{wb} \quad \cdots$$

$$\cdot \qquad \cdot \qquad \cdot$$

$$\cdot \qquad \cdot \qquad \cdot$$

$$\cdot \qquad \cdot \qquad \cdot$$

10   Mosaic white balance block 32 contains mosaic color
balance functions.   These functions may typically be
implemented as eight mosaic white balance LUTs (look-up
tables).   That is, for each exposure there is a set of four
LUTs, one for each mosaic data type: α, β, γ, and δ.
15 Independent calculation of white balance correction factors
is performed for each exposure.   This enables white
balancing scenes where the observable parts of the two
exposures are at different color temperatures.   The LUTs
may contain multiplicative correction factors which are
20 evaluated as follows:
      From the definitions of α, β, γ, δ and Y it follows,
that for a white image (where by definition R=G=B), the
following relations should hold:

25
$$\alpha_{wh} = \frac{6}{7} * Y$$

$$\beta_{wh} = \frac{8}{7} * Y$$

30
$$\gamma_{wh} = \frac{8}{7} * Y$$

35
$$\delta_{wh} = \frac{6}{7} * Y$$

10

Based on these relations correction factors can be
calculated by enforcing these relations on the average of
a white image:

5

$$C_\alpha = \frac{\frac{6}{7} * \overline{Y}}{\overline{\alpha}}$$

10

$$C_\beta = \frac{\frac{8}{7} * \overline{Y}}{\overline{\beta}}$$

15

$$C_\gamma = \frac{\frac{8}{7} * \overline{Y}}{\overline{\gamma}}$$

20

$$C_\delta = \frac{\frac{6}{7} * \overline{Y}}{\overline{\delta}}$$

25   where $\overline{Y}$ denotes a selective average over Y in the given
white image and $\overline{\alpha}$, $\overline{\beta}$, $\overline{\gamma}$ and $\overline{\delta}$ are the respective average
values of α, β, γ and δ. Saturated or cutoff pixels are
excluded from this average. Since by definition,

30      $$\overline{Y} = \frac{\overline{\alpha} + \overline{\gamma}}{2} = \frac{\overline{\beta} + \overline{\delta}}{2}$$

the equations for the correction factors are:

35      $$C_\alpha = \frac{3}{7} * \left(1 + \frac{\overline{\gamma}}{\overline{\alpha}} \right)$$

40      $$C_\beta = \frac{4}{7} * \left(1 + \frac{\overline{\delta}}{\overline{\beta}} \right)$$

45      $$C_\gamma = \frac{4}{7} * \left(1 + \frac{\overline{\alpha}}{\overline{\gamma}} \right)$$

        $$C_\delta = \frac{3}{7} * \left(1 + \frac{\overline{\beta}}{\overline{\delta}} \right)$$

50

The LUT values are calculated by simple multiplication of
each mosaic data type by its respective correction factor:

11

$$\alpha_{wb} = \alpha * C_\alpha$$
$$\beta_{wb} = \beta * C_\beta$$
$$\gamma_{wb} = \gamma * C_\gamma$$
$$\delta_{wb} = \delta * C_\delta$$

5

In an alternative embodiment, these LUTs are replaced by digital multipliers. Furthermore, the LUTs may also be loaded with correction functions other than simple linear multiplicative factors. Alternatively, the mosaic balance
10 correction factors can be computed based on four average signals, namely, α, β, γ and δ, instead of merely two of them as above. This alternative yields improved uniformity of color balance under difficult conditions. Alternatively, the white balance function may be done on the RGB
15 color components in the color conversion block 78 (described below).

Referring now to Figure 4, color path block 28 is shown in more detail. As previously stated, the input to color path block 28 is the image data α_{wb}, β_{wb}, γ_{wb}, δ_{wb} after
20 processing by mosaic white balance block 32.

The initial processing of color path block 28 is performed by color difference evaluation block 34 which receives data α_{wb}, β_{wb}, γ_{wb}, δ_{wb} from mosaic white balance block 32 and calculates color difference components dr, db
25 for each pixel in the array:

$$
\begin{array}{llll}
dr\ dr\ dr\ .\ .\ .\ . & = (\gamma-\alpha)\ (\gamma-\alpha)\ (\gamma-\alpha)\ .\ .\ .\ . \\
db\ db\ db\ .\ .\ .\ . & = (\delta-\beta)\ (\delta-\beta)\ (\delta-\beta)\ .\ .\ .\ . \\
dr\ dr\ dr\ .\ .\ .\ . & = (\gamma-\alpha)\ (\gamma-\alpha)\ (\gamma-\alpha)\ .\ .\ .\ . \\
db\ db\ db\ .\ .\ .\ . & = (\delta-\beta)\ (\delta-\beta)\ (\delta-\beta)\ .\ .\ .\ .
\end{array}
$$

30 wherein:

$dr \equiv \gamma - \alpha$, the differences between successive readings in even lines.

SUBSTITUTE SHEET (RULE 26)

12

$db \equiv \delta - \beta$, the differences between successive readings in odd lines.

The correct evaluation of dr and db requires horizontal interpolation as described in the following equations:

For each pixel (i,j) in even lines i:

$$dr(j_{odd}) = \gamma_{wb}(j_{odd}) - \frac{\alpha_{wb}(j_{odd}-1) + \alpha_{wb}(j_{odd}+1)}{2}$$

$$dr(j_{even}) = \frac{\gamma_{wb}(j_{even}-1) + \gamma_{wb}(j_{even}+1)}{2} - \alpha_{wb}(j_{even})$$

where j is the pixel index along the line (here and henceforth).

For each pixel (i,j) in odd lines i:

$$db(j_{odd}) = \delta_{wb}(j_{odd}) - \frac{\beta_{wb}(j_{odd}-1) + \beta_{wb}(j_{odd}+1)}{2}$$

$$db(j_{even}) = \frac{\delta_{wb}(j_{even}-1) + \delta_{wb}(j_{even}+1)}{2} - \beta_{wb}(j_{even})$$

Color difference components dr, db are thereafter received by low-pass color component block 36 which calculates a low-pass color component dr_{lp} or db_{lp} for each pixel:

$$dr_{lp}dr_{lp}dr_{lp} \ \ldots \ . = (\gamma - \alpha)_{lp} \ (\gamma - \alpha)_{lp} \cdot \ \cdot \ \cdot$$
$$db_{lp}db_{lp}db_{lp} \ \ldots \ . = (\delta - \beta)_{lp} \ (\delta - \beta)_{lp} \cdot \ \cdot \ \cdot$$
$$dr_{lp}dr_{lp}dr_{lp} \ \ldots \ . = (\gamma - \alpha)_{lp} \ (\gamma - \alpha)_{lp} \cdot \ \cdot \ \cdot$$
$$db_{lp}db_{lp}db_{lp} \ \ldots \ . = (\delta - \beta)_{lp} \ (\delta - \beta)_{lp} \cdot \ \cdot \ \cdot$$

Block 36 performs horizontal low-pass filtering on dr_{hp} and db_{hp} calculated in block 34. This reduces color artifacts caused by interpolation. In a preferred embodiment, the low-pass filter width is five pixels and its coefficients are ⅛, ¼, ¼, ¼, ⅛. The equations follow:

SUBSTITUTE SHEET (RULE 26)

13

For pixels (i,j) in even lines i:

$$dr_{lp}(j) = \frac{dr(j-2) + 2*dr(j-1) + 2*dr(j) + 2*dr(j+1) + dr(j+2)}{8}$$

5

For pixels (i,j) in odd lines i:

$$db_{lp}(j) = \frac{db(j-2) + 2*db(j-1) + 2*db(j) + 2*db(j+1) + db(j+2)}{8}$$

10

Delay buffer 38 receives the output from low-pass color component block 36 and directs $db_{lp}(i_{even} -1)$, $dr_{lp}(i_{odd} - 1)$, $db_{lp}(i_{even} +1)$ and $dr_{lp}(i_{odd}+1)$ to vertical interpolation block 40 and $dr(i_{even})$ and $db(i_{odd})$ to multiplexer 42.

15   Vertical interpolation block 40 receives the low-pass color components as described above and generates interpolated low-pass color components dr'_{lp} in the odd numbered lines and db'_{lp} in the even numbered lines:

$$db'_{lp} \quad db'_{lp} \quad db'_{lp} \quad db'_{lp} \quad . \quad . \quad . \quad . \quad .$$
$$dr'_{lp} \quad dr'_{lp} \quad dr'_{lp} \quad dr'_{lp} \quad . \quad . \quad . \quad . \quad .$$
20
$$db'_{lp} \quad db'_{lp} \quad db'_{lp} \quad db'_{lp} \quad . \quad . \quad . \quad . \quad .$$
$$dr'_{lp} \quad dr'_{lp} \quad dr'_{lp} \quad dr'_{lp} \quad . \quad . \quad . \quad . \quad .$$

The equations follow:

For even lines i:

25
$$db'_{lp}(i,j) = \frac{db_{lp}(i-1,j) + db_{lp}(i+1,j)}{2}$$

For odd lines i:

30
$$dr'_{lp}(i,j) = \frac{dr_{lp}(i-1,j) + dr_{lp}(i+1,j)}{2}$$

SUBSTITUTE SHEET (RULE 26)

14

The interpolated low-pass color components dr'_{lp}, db'_{lp} are multiplexed with the original low-pass components dr_{lp}, db_{lp} to give the color path output values dr and dp for each pixel. This function is performed by multiplexer 42, which separates the output received from delay buffer block 38 and vertical interpolator block 40 into a first path including db'_{lp} (i_{even}) and $db_{lp}(i_{odd})$ and a second path including dr_{lp} (i_{even}) and $dr'_{lp}(i_{odd})$.

Referring now to Figure 5, which discloses in more detail the intensity (Y) processing block 30 shown in Figure 3, one sees that the input to intensity (Y) processing block 30 from mosaic white balance block 32 (Figure 3) is received by intensity evaluation block 44 which outputs computed intensity Y for each pixel.

Since only one of the four data types (α, β, γ, δ) is present at any given pixel, the intensity evaluation block 44 calculation is performed as follows (based on the prior definition of Y):

For pixels (i,j) in even lines i:

$$Y(j_{odd}) = \frac{\gamma(j) + \alpha(j-1)}{2}$$

$$Y(j_{even}) = \frac{\alpha(j) + \gamma(j-1)}{2}$$

For pixels (i,j) in odd lines i:

$$Y(j_{odd}) = \frac{\delta(j) + \beta(j-1)}{2}$$

$$Y(j_{even}) = \frac{\beta(j) + \delta(j-1)}{2}$$

The output from intensity evaluation block 44 is received by delay buffer 46, generate output intensity block 48 and limit block 50.

Delay buffer 46 is a delay line of two horizontal lines, required for the 3x3 and 1x3 matrix transformations in Y path block 30. Together with the color path delay

15

buffer 38 and with Y path delay buffer 54, it may be
implemented in a preferred embodiment in mosaic data space,
operating on the input α, β, γ, δ data before the intensity
(Y) evaluation block 44 and color difference evaluation
5   block 34. It is shown here schematically for clarity.
        Vertical low-pass filter 52 receives intensity (Y)
signals from the intensity evaluation block 44 as delayed
by delay buffer 46. Block 52 generates the vertical low-
pass intensity Y_{vlp} defined as:

10
$$Y_{vlp}(i,j) = \frac{Y(i-1,j) + 2Y(i,j) + Y(i+1,j)}{4}$$

        The unfiltered intensity (Y) input will sometimes
exhibit horizontal stripes, one pixel high in each field,
15   in areas of transition to saturation. These stripes stem
from the different color spectra of the α, β, γ, and δ
pixels, as a result of which the $\alpha+\gamma$ value of Y(i(even),j)
may, for instance, reach saturation at a lower level of
optical intensity than the $\beta+\delta$ value of the vertically
20   adjacent Y(i+1(odd),j). Y_{vlp} averages these values to obtain
a function that is smooth over the transition area.
        Generate output intensity block 48 receives intensity
(Y) information from intensity evaluation block 44 and
vertical low-pass intensity (Y_{vlp}) information from vertical
25   low-pass filter 52. The output of block 48 is output
intensity (Y_{out}) to point processing LUT block 62 (see Figure
1).
        Block 48 replaces the original luminance Y, computed
by the intensity evaluation block 44, with Y_{vlp} when Y_{vlp}
30   approaches saturation, in order to prevent the appearance
of horizontal stripes as explained above. Block 48
implements the function:

16

$$Y_{out} = \begin{cases} Y & \text{if } Y_{vlp} < Y_{threshold} \\ Y_{vlp} & \text{if } Y_{vlp} \geq Y_{threshold} \end{cases}$$

5

10

15

The value of $Y_{threshold}$ is typically equal to approximately 220 on an 8-bit scale of 0-255. As values of Y approach saturation, image detail is lost in any event, so that substituting Y_{vlp} in the high range does not adversely affect the perceived resolution. Y_{vlp} is used as the selecting input in order to ensure a smooth transition.

Limit block 50 receives intensity (Y) signals from intensity evaluation block 44 and generates limited luminance Y_{limit}. Limit block 50 cuts off the upper range of intensity (Y) values that are to be input to edge detection block 56, in order to prevent detection of false edges or horizontal stripes that can arise in areas of transition to saturation. Limit block 50 implements the function:

$$Y_{limit} = \min\{Y, Y_{lim}\}$$

the value of Y_{lim} is typically equal to approximately 220.

20

25

30

The output of limit block 50 (i.e., Y_{limit}) is delayed by delay buffer 54 and received by edge detection block 56 which outputs edge information for each pixel.

Edge detector block 56 convolves the Y_{limit} value and its 8 immediate neighbors, with a high-pass or edge detecting kernel.

In one embodiment, the 3x3 Laplacian operator may be used:

$$\frac{1}{8} * \begin{bmatrix} -1 & -1 & -1 \\ -1 & 8 & -1 \\ -1 & -1 & -1 \end{bmatrix}$$

Alternatively, to accommodate the geometric characteristics of the CCD raster and to give greater

SUBSTITUTE SHEET (RULE 26)

17

emphasis to the vertical edges, the following kernel may be used:

$$\frac{1}{8} * \begin{bmatrix} -\frac{1}{2} & -1 & -\frac{1}{2} \\ -2 & 8 & -2 \\ -\frac{1}{2} & -1 & -\frac{1}{2} \end{bmatrix}$$

5

In an alternative embodiment, the edge detector block 56 could be implemented as separate horizontal and vertical convolution operations (such as a 1 x 3 or 3 x 1 matrix), with additional logic to avoid overemphasis of diagonal edges. This alternative embodiment is less hardware intensive and gives improved picture quality in some circumstances.

10

Edge suppress block 58 receives the vertical low-pass intensity (Y_{vlp}) signals from vertical low-pass filter 52 and outputs edge suppression function f_{edge} to edge multiplier 60.

15

The edge suppression function varies between 0 and 1 in the long exposure processing block 24 only. In the short exposure processing block 26, the function is set to 1, i.e., no edge suppression at this point. The function is typically implemented in block 24 in a piecewise linear fashion as follows:

20

$$f_{edge} = \begin{cases} 1 & \text{if } Y_{vlp} < \text{LOWSAT} \\ 1 - \dfrac{Y_{vlp} - \text{LOWSAT}}{\text{DEEPSAT}-\text{LOWSAT}} & \text{if LOWSAT} \le Y_{vlp} < \text{DEEPSAT} \\ 0 & \text{if DEEPSAT} \le Y_{vlp} \end{cases}$$

25

Typically LOWSAT is set to approximately 190 and DEEPSAT to approximately 220.

30

Edge multiplier 60 receives input from blocks 56, 58 and generates suppressed edge ed_{supp} to intensity (Y) result calculation.

Edge multiplier 60 multiplies the edge output of the edge detector block 56 by the edge suppression function f_{edge}

35

SUBSTITUTE SHEET (RULE 26)

18

from block 58 to generate an output value ed_{supp} to joint operations block 64 (see Figure 1). The purpose of this multiplication is to suppress distorted large edges that may appear in the long exposure at intensity (Y) values

5   near saturation, at the same time as they appear in the short exposure at lower values of intensity (Y). The double appearance of such edges was found empirically to cause the resulting displayed edges to be overemphasized and sometimes smeared on account of blooming in the long

10   exposure. The long exposure edge is suppressed so that only the short exposure edge will pass through to the output image. The edge suppress function may also be used to reduce the amplitude of edges from the long exposure which may be otherwise exaggerated due to the higher gain

15   of the long exposure relative to the short exposure.

Additionally, as shown in phantom in Figure 5, an optional multiplier or LUT (block 57) may be added to multiply the output of block 56 times the ratio of exposure times (duration of long exposure/duration of short

20   exposure) or the corresponding gain ratio, or some function of the exposure and/or gain ratio. This reflects the ratio of scales of these two values.

In the above manner, Y path block 30 outputs processed luminance Y_{out}, edge, and edge_{supp} to point processing block 62

25   and joint operations block 64.

Referring now to Figure 6, one sees that point processing block 62 includes four point processing functions, all of which receive output intensity (Y_{out}) values from the long and short exposure processing blocks

30   24, 26 (see Figure 1). These functions may typically be implemented as LUTs in RAM or ROM memory. Point processing block 62 generates arbitrary function values for input to the joint operations block 64 (Figure 1).

SUBSTITUTE SHEET (RULE 26)

19

The four tables of block 62 are:

1.   The intensity (DC result) block 66 which
         generates a LUT value of intensity (Y_{lut}) for the joint
         operations block 64.

5   Block 66 controls the amount of point ("DC")
         luminance that is summed with the edge information in
         generating the output luminance, Y_{result}. In its most
         general formulation,

$$Y_{lut} = f(Y_{out}^{(short)}, Y_{out}^{(long)})$$

where f is an arbitrary function. It has been found
that a quasilogarithmic or fractional power dependence
of Y_{lut} on the inputs gives the best output image
appearance, and the general function above can
15   generally be reduced to a more compact LUT or
         piecewise linear implementation.

         One simple possible computation of Y_{lut} is as
follows:

    a) Y_{short} is multiplied by the exposure ratio, so that
20   it is on the same scale as Y_{long}. That is, if a
         certain pixel x is acquired within the active
         (linear) sensitivity region of both the short and
         long exposures, then $Y_{long}(x) = R*Y_{short}(x)$, where R
         is the exposure ratio, R=long exposure time/short
25   exposure time (or any other ratio representing
         the two sensitivities).

    b)   Subsequently, Y_{long} and $R*Y_{short}$ are linearly
         combined, so that the sum of their relative
         weights is always 1. That is, $Y_{wdr}=a*Y_{long} +$
30       $b*R*Y_{short}$, $1 \geq a \geq 0$, $1 \geq b \geq 0$, and a+b=1 (the wdr index
         stands for 'wide dynamic range'). The common
         practice is to set a=1 in the region where the
         short exposure is cut-off (too dark), b=1 in the
         region where the long exposure is saturated (too

SUBSTITUTE SHEET (RULE 26)

20

bright), and a>0, b>0 in the region where both exposures carry meaningful information. However, this does not cover all cases, e.g. when neither exposure carries any information (long is

5   saturated and short is cut-off, or both saturated, or both cut-off).

c)   Finally, the dynamic range of Y_{wdr} is reduced (yielding Y_{lut}) by either a logarithmic function, or by multiplying it by a small fraction, or by

10   using any empirically found mapping which resembles the log function or a similar contraction, e.g., the square root.

Other possible values for Y_{lut} comprise empirical modifications of the function described above.

15   2. & 3.   Color weight normalize blocks 68, 70 for long and short exposures, respectively, which generate normalizing color weights w_l/Y_l and w_s/Y_s. Blocks 68 and 70 control the proportions of mixing the color values, dr and db, from the long

20   and short exposures, respectively, that will be used to generate the output color values, dr_{result} and db_{result}. Generally, w_l and w_s are chosen so as to give predominant weight at each pixel to the color values taken from the exposure in which the

25   intensity (Y) luminance values are in the linear portion of the range, and to give a smooth transition over luminance gradient regions of the image. For the most part, w_l and w_s are determined on the basis of Y_{out}(long) alone, except for

30   cases where the long exposure is near saturation while the short is near cutoff, so that neither gives a linear reading.

The weighting values are complementary, i.e., $w_l = 1 - w_s$, and w_l, $w_s \geq 0$. The outputs of

35   blocks 68 and 70 are normalized by division by

the corresponding values of Y_{out} for the long and short exposures. Preferably, a floating point representation for the output values of blocks 68, 70 is used so as to maintain sufficient accuracy to prevent noticeable quantization in the output image.

Alternatively, instead of weighted addition of the normalized color from the two exposures, simple selection of the normalized color from one exposure or the other, with an ordered dither (alternation) of the color selection in areas of transition may be used. In this case, when $w_l = 1$, the color is selected from the long exposure; when $w_s = 1$, it is selected from the long exposure, and when neither w factor is 1, color values are taken alternately from long and short, according to a pseudo-random probability distribution in which the long and short color value probabilities are equal to the w_l and w_s values. A normalized color value that is an average of the long and short values may also be mixed into the dither, in order to give a smoother color transition.

4. Saturation color suppression factor block 72 generates the color suppression factor Wht that reduces chroma saturation (adds white to the image) in areas of luminance saturation of the input image. An additional edge color suppression factor, Z_{cd}, is computed in the joint operations block (as will be described hereinafter). The minimum of Wht and Z_{cd}, both of which vary from 1 to 0, multiplies the chroma components at the output stage of color conversion. Thus, as Wht approaches zero, so does the color saturation of the output image.

22

The purpose of the saturation color suppression function is to reduce the appearance of color artifacts that arise due to CCD saturation. The linear relationships between the

5   α, β, γ, and δ CCD outputs and the true RGB colors break down as the CCD 14 approaches saturation. As non-linear deviations cannot be readily corrected, suspected distorted colors are "whitewashed". Similar techniques are used in

10   the analog domain in conventional CCD cameras. As shown in Figure 6:

$$Wht = w_l + w_s \ast z_s$$

w_l and w_s are identical to the above color weighting values. The variable Z_s is a function

15   of Y_{out}(short), varying between 0 and 1, as shown schematically in the lower right corner of Figure 6. It tends to zero in areas where the short exposure luminance approaches either saturation or cutoff. This function will give Wht = 0 at

20   the saturation end (where generally w_s = 1 while w_l = 0). At the cutoff end, normally $w_l \approx 1$ as long as there is adequate overlap between the long and short exposures, so that in this range the function will usually give Wht $\approx$ 1.

25   In normal mode, in which only one input channel is operative (see explanation below), Wht = 1 from Y=0 up to the low saturation threshold (typically 190). From this threshold up to the deep saturation limit of Y (typically 220), Wht

30   drops linearly to its saturation value of 0. In replay mode (see below), there is no saturation color suppression.

Figure 7 discloses the joint operations block 64 (also see Figure 1).

23

Joint operations block 64 combines the chrominance and luminance data from the long and short exposure processing blocks 24, 26, together with data from point processing block 62, to generate a combined Y/dr/db result. Block 64
5   then converts this result to output in standard RGB or Y/Cr/Cb (luminance, chrominance (red) and chrominance (blue)) color space. A color suppression factor Z is computed and applied to the chrominance outputs in order to reduce color artifacts (by reducing chroma saturation)
10 around edges and areas of luminance signal saturation.

Joint operations block 64 includes:

1.   The dr, db, Y block 74 (recalling that dr and db are the differences between successive readings in even and odd lines,
15   respectively) which receives dr, db values from the color path outputs of long and short exposure processing blocks 24, 26 respectively; ed_{supp} from the intensity (Y) path output of long exposure processing
20   block 24 and edge data from the intensity (Y) path output of short exposure processing block 26; and Y_{LUT}, w_l/Y_l and w_s/Y_s from table processing (LUT) block 62. Block 74 generates combined intensity Y/dr/db results
25   to color conversion block 78 (to be discussed). Block 74 will be discussed in greater detail hereinafter.

2.   The color suppression factor block 76 which receives ed_{long} and ed_{short} from edge detector
30   block 56 and saturation color suppression factor (Wht) from point processing block 62 and generates chroma suppression factor Z for color conversion block 78. Block 76 will be discussed in greater detail
35   hereinafter.

SUBSTITUTE SHEET (RULE 26)

24

3. The color conversion block 78 which receives
    Y_{result}, dr_{result}, db_{result} from block 74 and Z, the
    color suppression factor from block 76 and
    generates R_{out}, G_{out}, and B_{out} and Cr and Cb.
5   Block 78 will be discussed in greater detail
    hereinafter.

The dr, db, Y block 74 is shown in further detail in
Figure 8.

Block 74 includes an intensity (Y) calculation which
10 is performed by adders 79, 80 and edge limiting block 81.
Adder 79 receives ed_{supp} (long) data from long exposure
processing block 24, and ed_{short} from short exposure
processing block 26. These two inputs are added to give
$edge_{result}$, which is then input to the edge limiting block 81.
15 Edge limiting is implemented as a piecewise linear function
with 6 inflection points ($A_1...A_6$) and 4 slopes ($S_1...S_4$), as
shown in the upper right inset of Figure 8. Generally the
inflection points and slopes are chosen so as to enhance
the smaller edges (i.e., S_2 and $S_3 \geq 1$), while large edges
20 (edge > A_5 or < A_2) are suppressed. Since these large edges
come through strongly in the Y_{LUT} contribution anyway, the
output image has a more pleasing appearance if they are not
additionally enhanced. A_3 and A_4 may be set to 0, but it is
sometimes desirable to set them to small non-zero values in
25 order to suppress false edges due to noise. The best
results appear to be obtained with $|A_1|$ and $|A_6|$ values of
50 to 60. The best values of the slopes $|S_i|$ are typically
in the range 0.5 to 2, but the hardware allows a greater
range.
30 The $edge_{limited}$ output is then summed by adder 80 with the
Y_{LUT} output of block 62 to obtain the output luminance value
Y_{result}. Additionally, as shown in phantom in Figure 10, adder
80 may be removed from its location in Figure 8 and placed

25

so that the output of block 81 is not added to Y_{result} until just before being added into block 113_{A-C}, that is, as late as possible.

5   Block 74 further includes a dr, db calculation which is performed by the remaining sections of block 74. The dr, db calculation receives low-pass color components dr, db from the color paths of long and short exposure processing blocks 24, 26; w_l/Y_l and w_s/Y_s from block 62; and

10   Y_{result} as calculated by adder 80. The dr, db calculation outputs dr_{result} and db_{result}.

The long and short values of dr and db are multiplied by the respective normalized color weights, w_l/Y_l and w_s/Y_s by multipliers 82, 84, 86, 88. These normalized, weighted

15   color values from the two exposures are summed together by adders 90, 92 and then multiplied by Y_{result} by multipliers 94, 96 to give the scaled values:

$$dr_{result} = Y_{result} * \left(dr_l \frac{w_l}{Y_l} + dr_s \frac{w_s}{Y_s} \right)$$

20

$$db_{result} = Y_{result} * \left(db_l \frac{w_l}{Y_l} + db_s \frac{w_s}{Y_s} \right)$$

Alternatively, dr_{result} and db_{result} may be generated by

25   selection between the long and short normalized dr and db inputs (and possibly their long/short average values).

The color suppression factor block 76 of Figure 7 is shown in more detail in Figure 9.

Maximum value block 100 selects the higher of the two

30   absolute values of ed_{long} and ed_{short} as calculated by absolute value blocks 98, 99. The result of the calculation of block 100, ed_{max}, is input to edge chroma suppression factor block 102 to calculate Z_{cd}. The calculation of Z_{cd} is implemented as a piecewise linear function, shown in the

35   upper right corner of Figure 9. As can be seen in Figure 9, Z_{cd} receives a value between Th and 1, given by:

SUBSTITUTE SHEET (RULE 26)

26

$$Z_{cd} = \begin{cases} 1 & \text{if } ed_{max}<E1 \\ Th + \dfrac{E2 - ed_{max}}{E2 - E1}\,(1 - Th) & \text{if } E1 \le ed_{max}<E2 \\ Th & \text{if } E2 \le ed_{max} \end{cases}$$

Typically, E1=10 and E2=27 have been found to give good results. The minimum value of Z_{cd}, Th, is ordinarily set to zero, to give complete chroma suppression at very strong edges. Th $\ne$ 0 is used only in replay of images stored in mosaic format (see generate mosaic block 120 described hereinafter), in which case Z_{cd} serves to suppress color anomalies resulting from the reinterpolation of the pixel values.

Thereafter, as shown in Figure 9, minimum value block 104 selects the minimum of the two color suppression factors, Z_{cd} and Wht, thereby determining the edge criterion or saturation criterion that should be used to provide the required degree of chroma suppression at the given pixel.

Referring now to Figure 10, which discloses in detail color conversion block 78 of Figure 7, one sees that color conversion block 78 receives Y_{result}, dr_{result}, and db_{result} from block 74 and Z from block 76 and generates outputs in both the RGB and Y/Cr/Cb formulations.

In other words, block 78 takes the interim dynamic range enhancement results Y/dr/db, and converts them into conventional color components for system output.

Block 78 includes horizontal low-pass filter 106 which receives Y_{result} and calculates Y_{result} (lp) for the color matrix block 108.

Horizontal low-pass filter 106 is identical to the low-pass color component block 36 in the color path block 28 (see Figures 3 and 4). Since the dr and db inputs to the color matrix 108 have already been low-pass filtered by this low-pass filter operator, it is necessary to filter

27

the intensity (Y) value as well in order to prevent color artifacts.

Color matrix block 108 receives Y_{result} (lp) from horizontal low-pass filter 106 and dr_{result} and db_{result} from block 74 and generates low-pass RGB color component outputs.

If one recalls the derivation of Y, dr and db from the original α, β, γ and δ values of the mosaic CCD input:

$$Y \equiv \frac{\alpha + \gamma}{2} \equiv \frac{\beta + \delta}{2}$$

$$dr \equiv \gamma - \alpha$$

$$db \equiv \delta - \beta$$

together with the RGB equivalencies of α, β, γ and δ, one obtains the following relationships between RGB and the Y/dr/db values:

$$\begin{bmatrix} R \\ G \\ B \end{bmatrix} = 3.5 * \begin{bmatrix} 0.2 & 0.4 & 0.1 \\ 0.4 & -0.2 & 0.2 \\ 0.2 & -0.1 & -0.4 \end{bmatrix} \begin{bmatrix} Y \\ dr \\ db \end{bmatrix}$$

The factor of 3.5 is required for normalization of the relation Y = R + 1.5G + B. Due to hardware implementation considerations, the color conversion matrix is calculated as follows:

$$\begin{bmatrix} R \\ G \\ B \end{bmatrix} = 0.7 * \begin{bmatrix} 1.0 & 2.0 & 0.5 \\ 2.0 & -1.0 & 1.0 \\ 1.0 & -0.5 & -2.0 \end{bmatrix} \begin{bmatrix} Y \\ dr \\ db \end{bmatrix}$$

In this way the matrix multiplication is performed by a series of shift/add operations. The multiplicative factor 0.7 is combined (by multiplication) with externally programmed RGB white balance correction factors as is described hereinafter.

28

RGB white balance multipliers 109_A, 109_B, 109_C receive low-pass RGB signals from color matrix block 108 and generate normalized low-pass RGB signals.

Multipliers 109_A, 109_B, 109_C multiply each of the RGB
5   low-pass values by a pre-computed white balance correction factor, adjusted by the normalization factor 0.7 required by the color matrix calculation. Although conventional RGB white balancing uses only two multiplicative factors, correcting R and B while G is held constant, this "short
10   cut" does not preserve constant Y achromatic luminance. This loss of normalization may lead to the appearance of artifacts and incorrect luminance in the output. It is necessary, therefore, to use three multiplicative factors, normalized to preserve constant luminance Y.

15   The calculation of the correction factors is performed off-line by capturing a white image and selectively computing average values $\overline{R}$, $\overline{G}$, $\overline{B}$, and $\overline{Y}$, excluding pixels near saturation or cutoff. From the definition $Y = R +$
       $1.5G + B$, it follows that for a corrected pixel in the
20   white image, it should be found that:

$$R = G = B = \frac{1}{3.5} Y$$

From this relationship one derives the correction factors
25   to be used in multipliers 109_A, 109_B, 109_C:

$$R \text{ factor} = \frac{1}{3.5} \frac{\overline{Y}}{\overline{R}}$$

30

$$G \text{ factor} = \frac{1}{3.5} \frac{\overline{Y}}{\overline{G}}$$

$$B \text{ factor} = \frac{1}{3.5} \frac{\overline{Y}}{\overline{B}}$$

35   Output signal enhancement block 110 (which includes chroma suppression and RGB output functions) receives

29

corrected low-pass RGB color component signals from color
matrix block 108 via multipliers 109$_A$, 109$_B$, 109$_C$; Y_{result} from
block 74; Y_{result} (lp) from block 106; and chroma suppression
factor Z from block 76.

5   As noted above, the RGB values output from color
matrix block 108 are low-pass values. High-frequency image
information is "re-injected" into RGB according to the
following equation (given here only for the R component,
since the treatment of G and B is identical):

10

$$R_{hp} = R_{lp} + K*Y_{result} - K*Y_{result}^{(lp)}$$

K is an arbitrary constant between 0 and 1, chosen
according to the degree of high-frequency enhancement
required. Values in the range $0.4 \leq K \leq 0.8$ are typically
15   used.

The addition and subtraction of Y_{result} values to the RGB
components can alter the original values of R/G and B/G,
with the result that the correct hue of the image is not
preserved. Therefore, in an alternative embodiment, R, G
20   and B are multiplied by a high-pass enhancement function.

Since the RGB color component values contain both
luminance and chrominance information, the chroma
suppression factor, Z, is best applied to chrominance-only
components, by adders 113$_A$, 113$_B$, 113$_C$:

25

$$Cr = R - Y_{result}$$

$$Cg = G - Y_{result}$$

$$Cb = B - Y_{result}$$

Combining these equations with the previous ones for "high
frequency re-injection", one obtains the following formula,
30   which is implemented as shown in Figure 10 (including
arithmetic element blocks 114, 115, 116) to obtain Cr from
R_{lp}:

SUBSTITUTE SHEET (RULE 26)

30

$$Cr = R_{ip} + K*(Y_{result} - Y_{result}^{(lp)}) - Y_{result}$$

and likewise for Cg and Cb. These Cr/Cg/Cb values are
multiplied by Z by multipliers 112_A, 112_B, 112_C. At this
point, Y/Cr/Cb output is available directly (using Y =
Y_{result}), though it is preferable to add a bias of +128 to the
signed digital outputs Cr and Cb in order to convert them
to positive values for D/A conversion. In the alternative,
Y_{result} can be added back into the chroma-suppressed Cr/Cg/Cb
values (by adders 113_A-113_C) to obtain the final $R_{out}/G_{out}/B_{out}$.

Referring now to Figure 11, which discloses generate
mosaic block 120 of Figure 1 in more detail, one sees that
the input of generate mosaic block 120 is $R_{out}/G_{out}/B_{out}$ from
color conversion block 78 of joint operations block 64.
The output of block 120 is the equivalent α, β, γ, δ values
in the format:

$$\alpha_{eq} \ \gamma_{eq} \ \alpha_{eq} \ \gamma_{eq} \ \cdot \ \cdot \ \cdot \ \cdot \ \cdot$$
$$\beta_{eq} \ \delta_{eq} \ \beta_{eq} \ \delta_{eq} \ \cdot \ \cdot \ \cdot \ \cdot \ \cdot$$
$$\alpha_{eq} \ \gamma_{eq} \ \alpha_{eq} \ \gamma_{eq} \ \cdot \ \cdot \ \cdot \ \cdot \ \cdot$$
$$\beta_{eq} \ \delta_{eq} \ \beta_{eq} \ \delta_{eq} \ \cdot \ \cdot \ \cdot \ \cdot \ \cdot$$

In order to reduce memory requirements for image
storage and to allow stored images to be replayed through
the apparatus 10 for display, the final RGB values from the
processed image are used to generate equivalent, simulated
mosaic values of α, β, γ, and δ. In this way, only eight
bits per pixel of information must be stored, rather than
the 24 bits of full output information. These mosaic
values can later be replayed to regenerate the stored
image.

The simulated mosaic values are generated by the
following matrix in matrix block 122, based on the color
equivalencies given hereinabove.

$$\begin{pmatrix} \alpha_{eq} \\ \beta_{eq} \\ \gamma_{eq} \\ \delta_{eq} \end{pmatrix} = \frac{1}{4} * \begin{bmatrix} 0 & 2 & 1 \\ 1 & 1 & 2 \\ 2 & 1 & 1 \\ 1 & 2 & 0 \end{bmatrix} \begin{pmatrix} R \\ G \\ B \end{pmatrix}$$

The factor of $\frac{1}{4}$ that multiplies the matrix is used for
reasons of hardware convenience — in order to ensure that
α, β, γ, and δ do not overflow the range 0-255 of 8 bits.
To maintain the normalization relations given hereinabove,
the factor should actually be 1/3.5. Therefore, in replay
mode, mosaic white balance block 32 is used to multiply the
α, β, γ, and δ values back by 4/3.5 (=8/7) before
reprocessing. Finally, multiplexer 124 selects which one
of the four mosaic values to output for each pixel
according to the table:

		j even	j odd
Pixel $_{i,j}$	i even	α	γ
	i odd	β	δ

Apparatus 10 has three modes of operation: normal,
adaptive sensitivity (AS), and replay.

1.   Normal mode emulates the performance of a mosaic color
CCD camera without adaptive sensitivity. In this mode only
the long exposure portion of the pipeline operates. The
processing functions are limited to decoding the mosaic
input into conventional color components: Y/Cr/Cb or RGB,
while additionally performing filtering operations for
anti-aliasing, detail (edge) enhancement and chroma
suppression where required.

32

2.   Adaptive sensitivity mode uses all the resources of the processing pipeline to generate wide dynamic range images as described hereinabove.

3.   Replay mode is required for displaying images that
5   have been stored in RAM or disk. Apparatus 10 stores these images in a regenerated mosaic format in order to save on storage memory requirements. Replay mode is similar to normal mode, except that most of the enhancement operations are not performed: since the stored data have already been
10   filtered once, it is for the most part not desirable to filter them again.

The preceding specific embodiments are illustrative of the practice of the invention. It is to be understood, however, that other expedients known to those skilled in
15   the art or disclosed herein, may be employed without departing from the spirit of the invention or the scope of the appended claims.

33

CLAIMS

What is Claimed is:

1. A color wide dynamic range video imaging apparatus comprising:

sensor means for providing a plurality of color video images of a scene at different exposure levels;

means for dividing each color video image into components; and

means for processing said components of each of said plurality of video images to produce a combined color video image including image information from said components of each of said plurality of color video images by applying neighborhood transforms to at least one of said components of each of said plurality of video images,

wherein said means for processing includes means for calculating point intensity data for said each of said plurality of said video images.

2. The color wide dynamic range video imaging apparatus of Claim 1, wherein said means for processing includes means for calculating color weighting factors.

3. The color wide dynamic range video imaging apparatus of Claim 2, wherein said means for processing includes means for calculating saturation color suppression factors.

4. The color wide dynamic range video imaging apparatus of Claim 1, wherein said means for dividing each color video image into components includes a filter means in front of said sensor means and said filter means includes filter elements of a plurality of colors, said plurality of colors corresponding to said components.

SUBSTITUTE SHEET (RULE 26)

34

5.   The color wide dynamic range video imaging apparatus of Claim 4, wherein said sensor means includes a plurality of pixel sensing elements and

5   wherein said filter elements are arranged in a regular repeating pattern with each filter element in front of a single pixel element of said sensing means.

6.   The color wide dynamic range video imaging apparatus of Claim 5, wherein said processing means
10   includes means for evaluating an intensity of each color component;

means for evaluating color suppression factors for each pixel; and

means for converting said components into RGB color
15   space.

7.   The color wide dynamic range video imaging apparatus of Claim 6, wherein said means for evaluating an intensity of each color component communicates with a means
20   for substituting luminance values when luminance otherwise approaches saturation.

8.   The color wide dynamic range video imaging apparatus of Claim 6, wherein said means for evaluating an
25   intensity of each color component communicates with a means for limiting luminance values.

9.   The color wide dynamic range video imaging apparatus of Claim 5, wherein said processing means
30   includes white balancing means which calculates correction factors for said components based upon the intensity of said color video images.

10.   The color wide dynamic range video imaging
35   apparatus of Claim 9, wherein white balancing means

35

calculates an average intensity of said color video images
excluding saturated pixels and cut-off pixels.

11. The color wide dynamic range video imaging
apparatus of Claim 9, including vertical low-pass filter
means receiving intensity and false edge suppression means,
wherein said false edge suppression means receives
intensity data from said vertical low-pass filter means and
calculates false edge suppression factors which are reduced
when said intensity data exceeds a pre-selected saturation
value.

12. The color wide dynamic range video imaging
apparatus of Claim 11, wherein said false edge suppression
means calculates said false edge suppression factors for an
image of a longest of said different exposure levels.

13. The color wide dynamic range video imaging
apparatus of Claim 12, further including edge detection
means and wherein an output of said edge detection means is
multiplied times said false edge suppression factors.

14. The color wide dynamic range video imaging
apparatus of Claim 5, wherein color components are
calculated by multiplying an intensity times a sum of
products of prior color components and output of said means
for calculating said color weighting factors.

15. The color wide dynamic range video imaging
apparatus of Claim 6, including means for calculating white
balance correction factors for said components converted
into RGB color space, wherein said white balance correction
factors for a given respective RGB component are calculated
by dividing average overall luminance by a multiple of an
average value of said respective given RGB component.

SUBSTITUTE SHEET (RULE 26)

36

16. The color wide dynamic range video imaging apparatus of Claim 15, wherein said average value of said respective given RGB component is calculated excluding pixels which are substantially near saturation or substantially near cut-off.

17. The color wide dynamic range video imaging apparatus of Claim 6, including means for converting said RGB color space components into mosaic color components corresponding to colors of said filter elements of said filter means.

18. The color wide dynamic range video imaging apparatus of Claim 1, wherein said means for processing is implemented on a single chip.

19. An imaging apparatus comprising:
sensor means for providing a plurality of color video images of a scene at different exposure levels;
means for dividing each color video image into components; and
means for processing said components of each of said plurality of video images to produce a combined color video image including image information from said components of each of said plurality of color video images by applying neighborhood transforms to at least one of said components of each of said plurality of video images,
wherein said means for processing includes means for calculating point intensity data for said each of said plurality of said video images, and
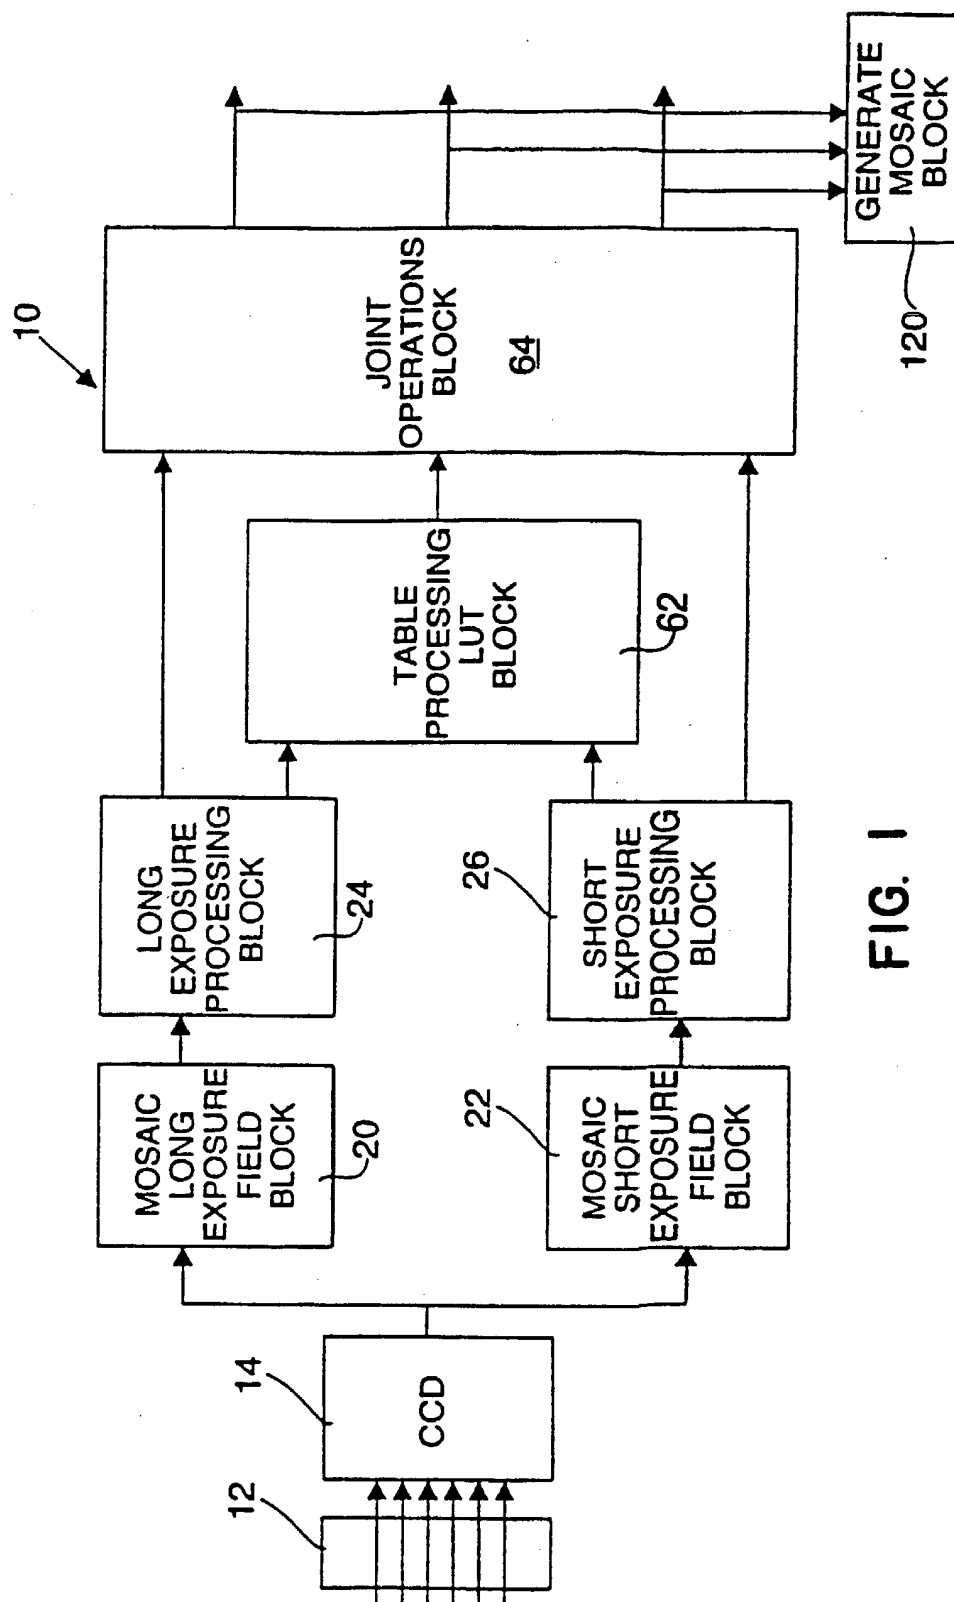wherein said processing means includes white balancing means which calculates correction factors for said components based upon the intensity of said color video images.

37

20. A color wide dynamic range video processing chip comprising:

   means for processing components of each of a plurality of video images of a scene at different exposure levels to
5 produce a combined color video image including image information from said components of each of said plurality of color video images by applying neighborhood transforms to at least one of said components of each of said plurality of video images,
10 wherein said means for processing includes means for calculating point intensity data for said each of said plurality of said video images.
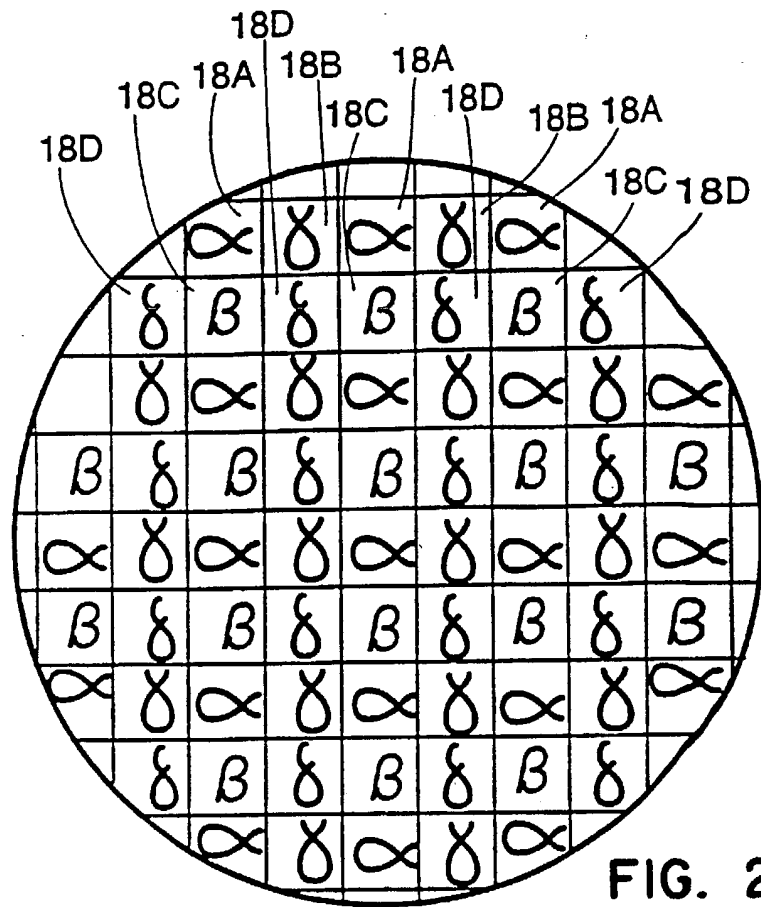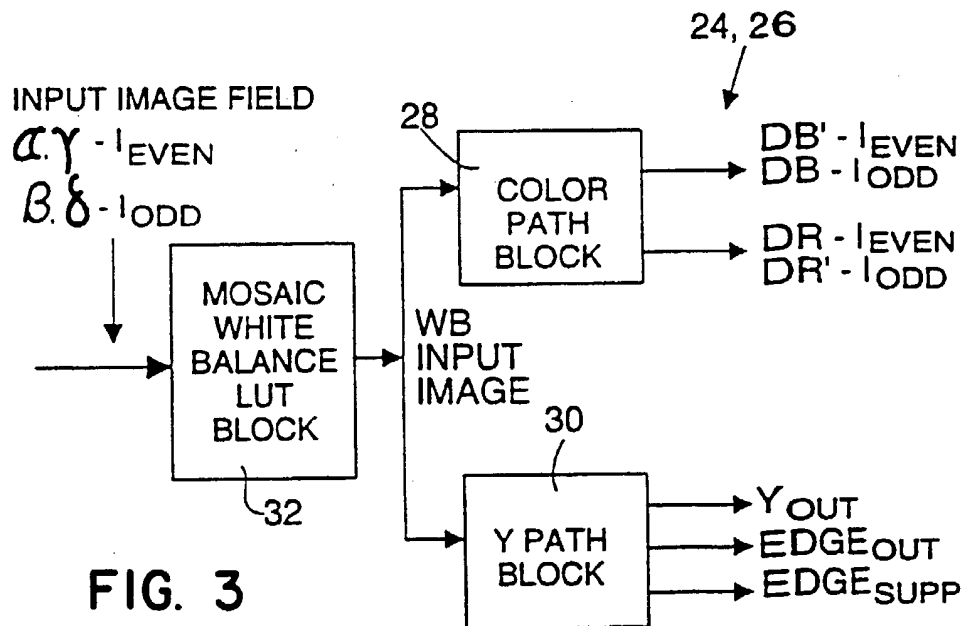
FIG. I

FIG. 2

FIG. 3

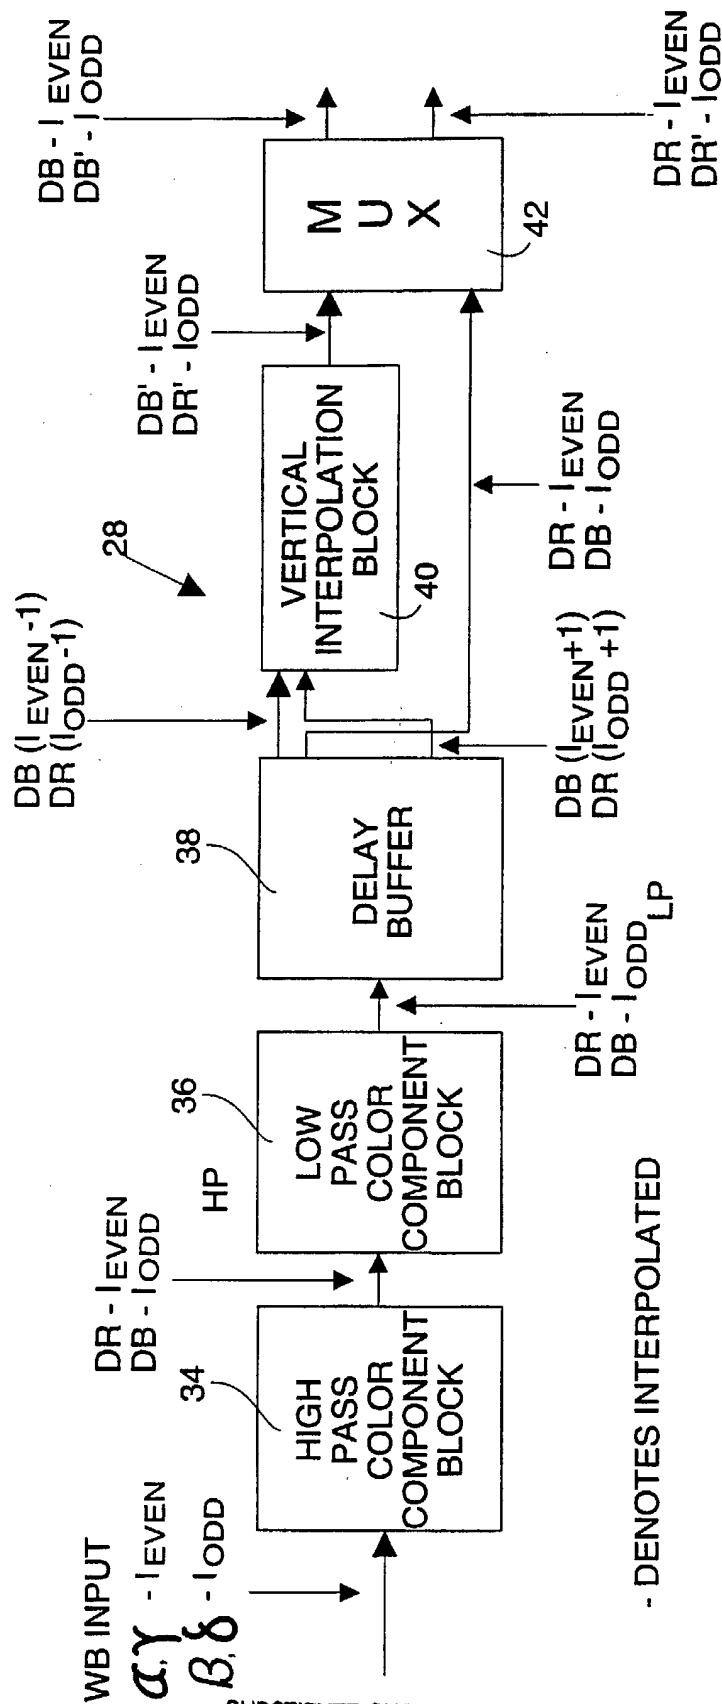INPUT IMAGE FIELD

$\alpha.\gamma - I_{EVEN}$

$\beta.\delta - I_{ODD}$

MOSAIC WHITE BALANCE LUT BLOCK

32

WB INPUT IMAGE

28

COLOR PATH BLOCK

24, 26

$DB' - I_{EVEN}$
$DB - I_{ODD}$

$DR - I_{EVEN}$
$DR' - I_{ODD}$

30

Y PATH BLOCK

Y_{OUT}

$EDGE_{OUT}$

$EDGE_{SUPP}$

WB INPUT

α, γ - I_{EVEN}
β, δ - I_{ODD}

HIGH PASS COLOR COMPONENT BLOCK   34

DR - I_{EVEN}
DB - I_{ODD}

HP

LOW PASS COLOR COMPONENT BLOCK   36

DR - I_{EVEN}
DB - $I_{ODD\ LP}$

DELAY BUFFER   38

DB (I_{EVEN}-1)
DR (I_{ODD}-1)

DB (I_{EVEN}+1)
DR (I_{ODD}+1)

DR - I_{EVEN}
DB - I_{ODD}

28

VERTICAL INTERPOLATION BLOCK   40

DB' - I_{EVEN}
DR' - I_{ODD}

DB' - I_{EVEN}
DR' - I_{ODD}

DR - I_{EVEN}
DB - I_{ODD}

M U X   42

DB - I_{EVEN}
DB' - I_{ODD}

DR - I_{EVEN}
DR' - I_{ODD}

FIG. 4

- DENOTES INTERPOLATED

4/10

FIG. 5

5/10

FIG. 6

FIG. 7

FIG. 8

FIG. 9

9/10

FIG. 10

$* K * (Y_{RESULT} - YR_{LP}) - Y_{RESULT}$

10/10

FIG. 11
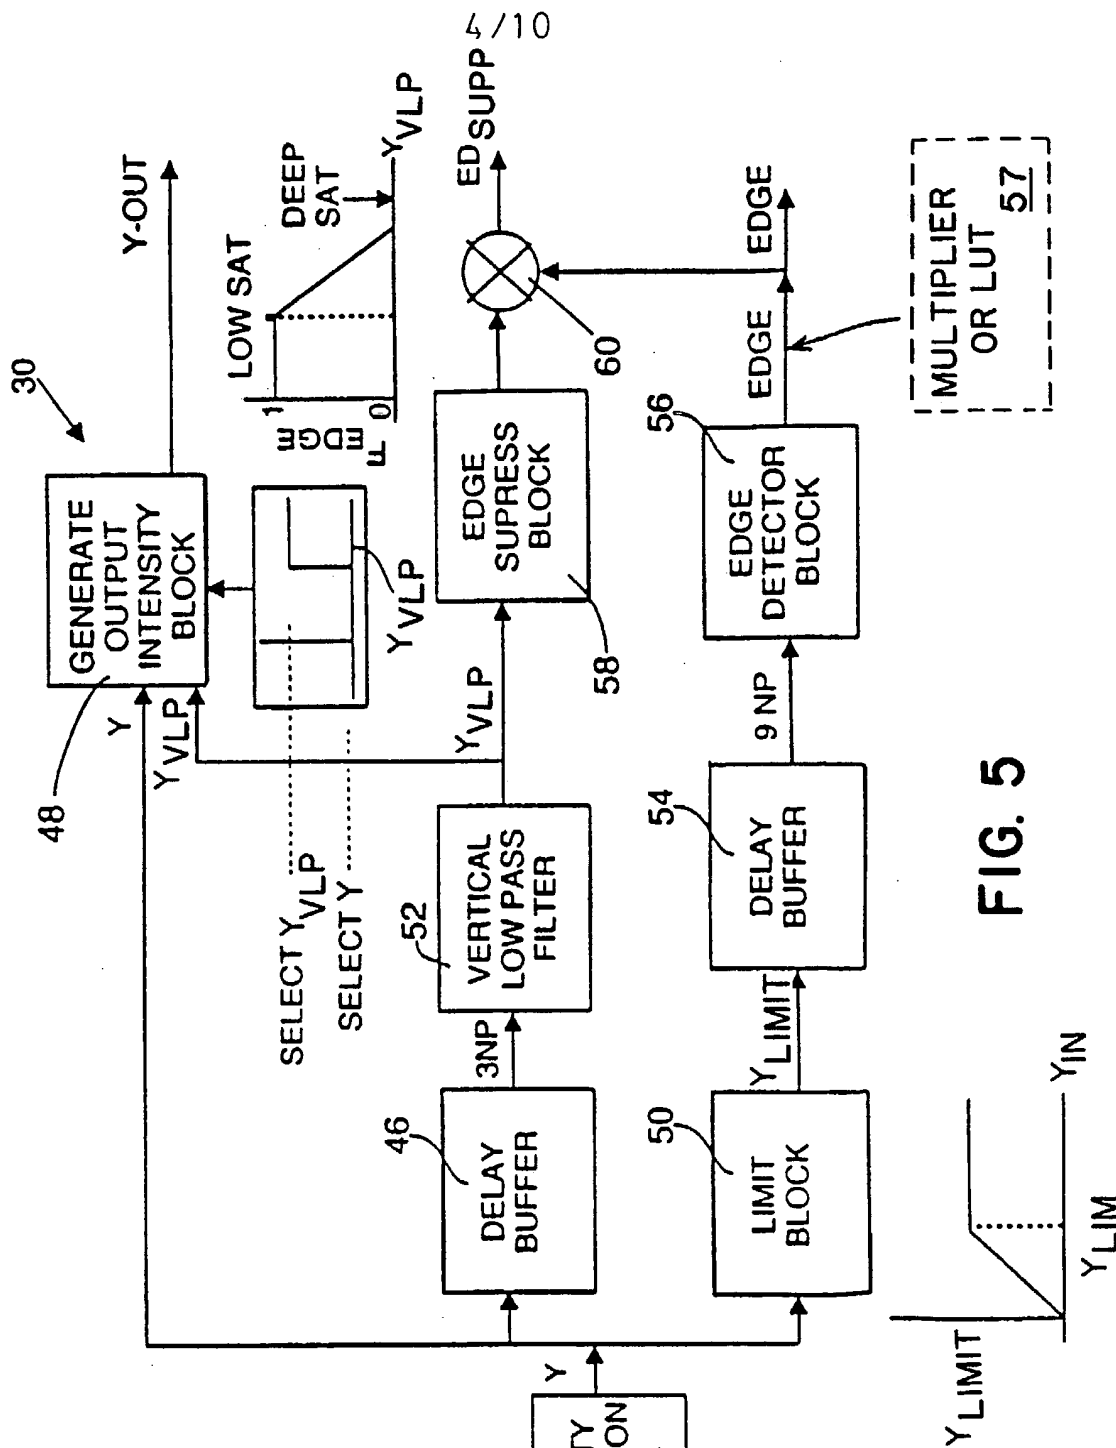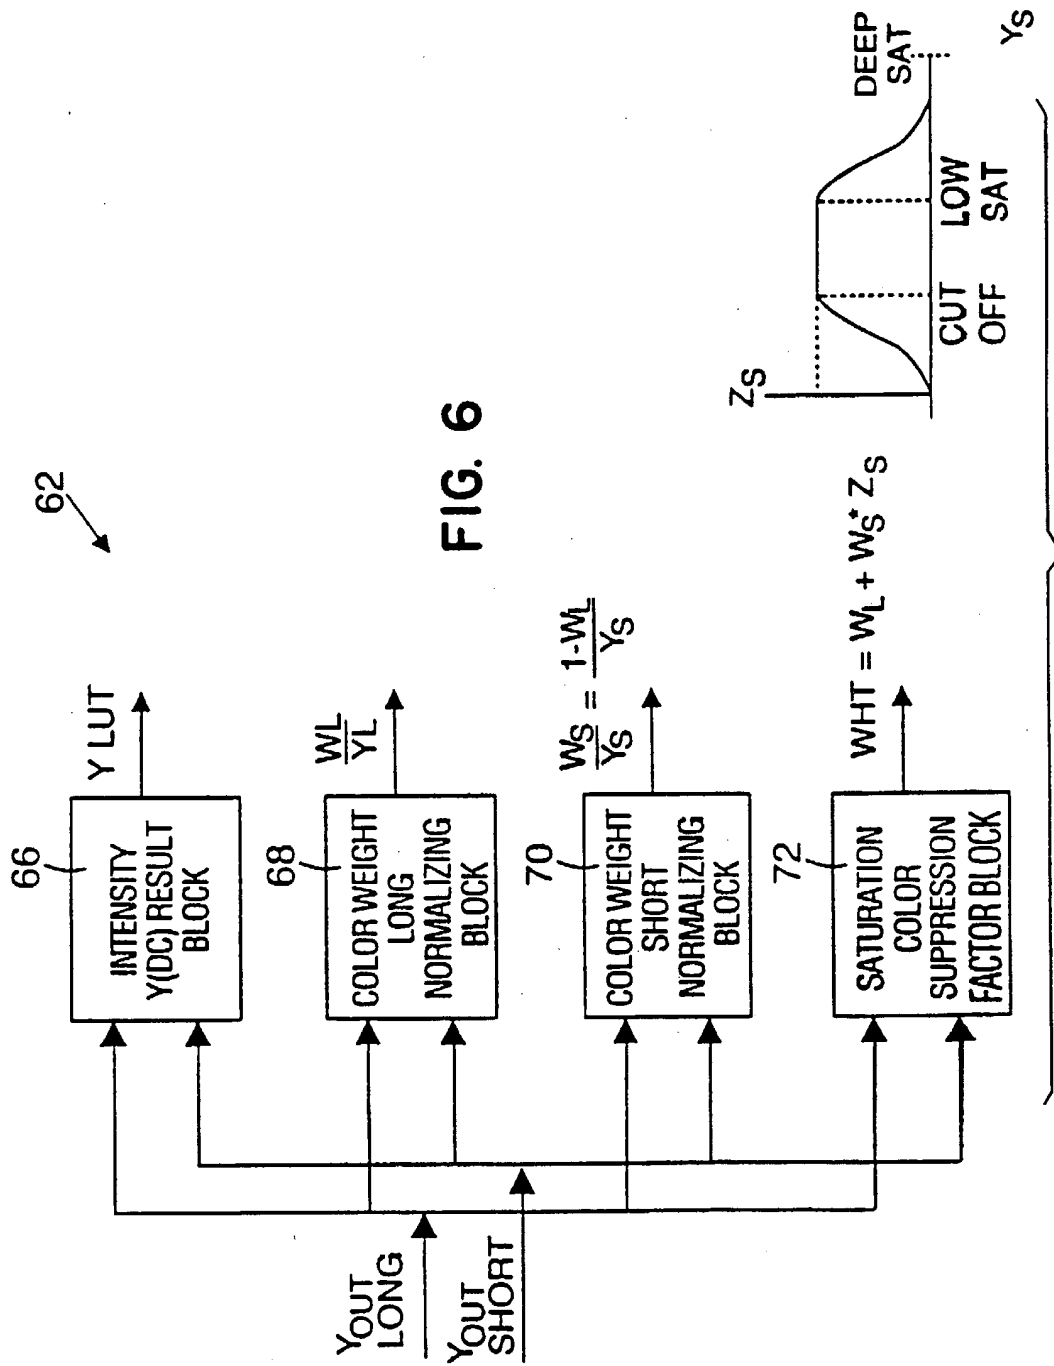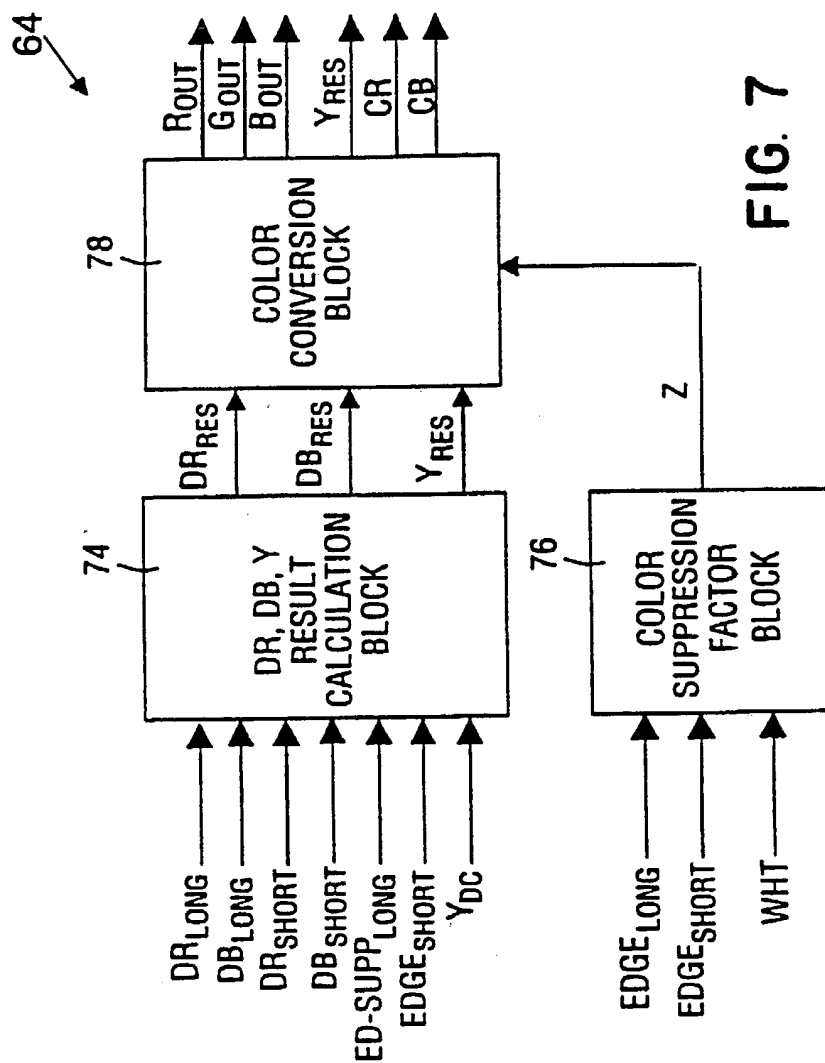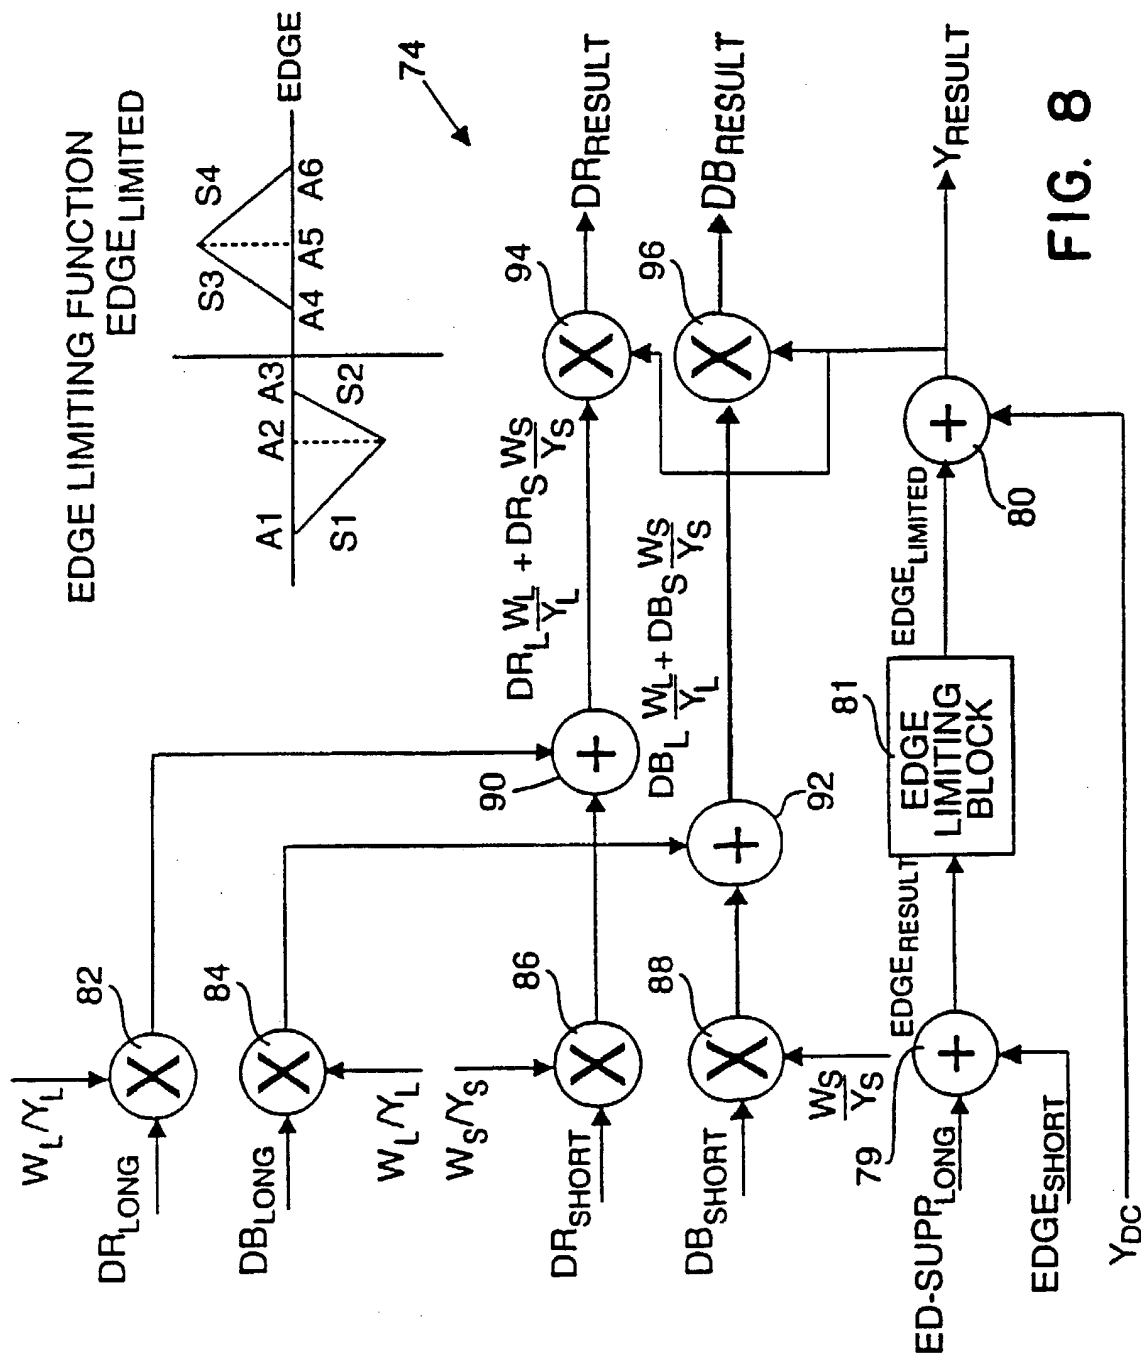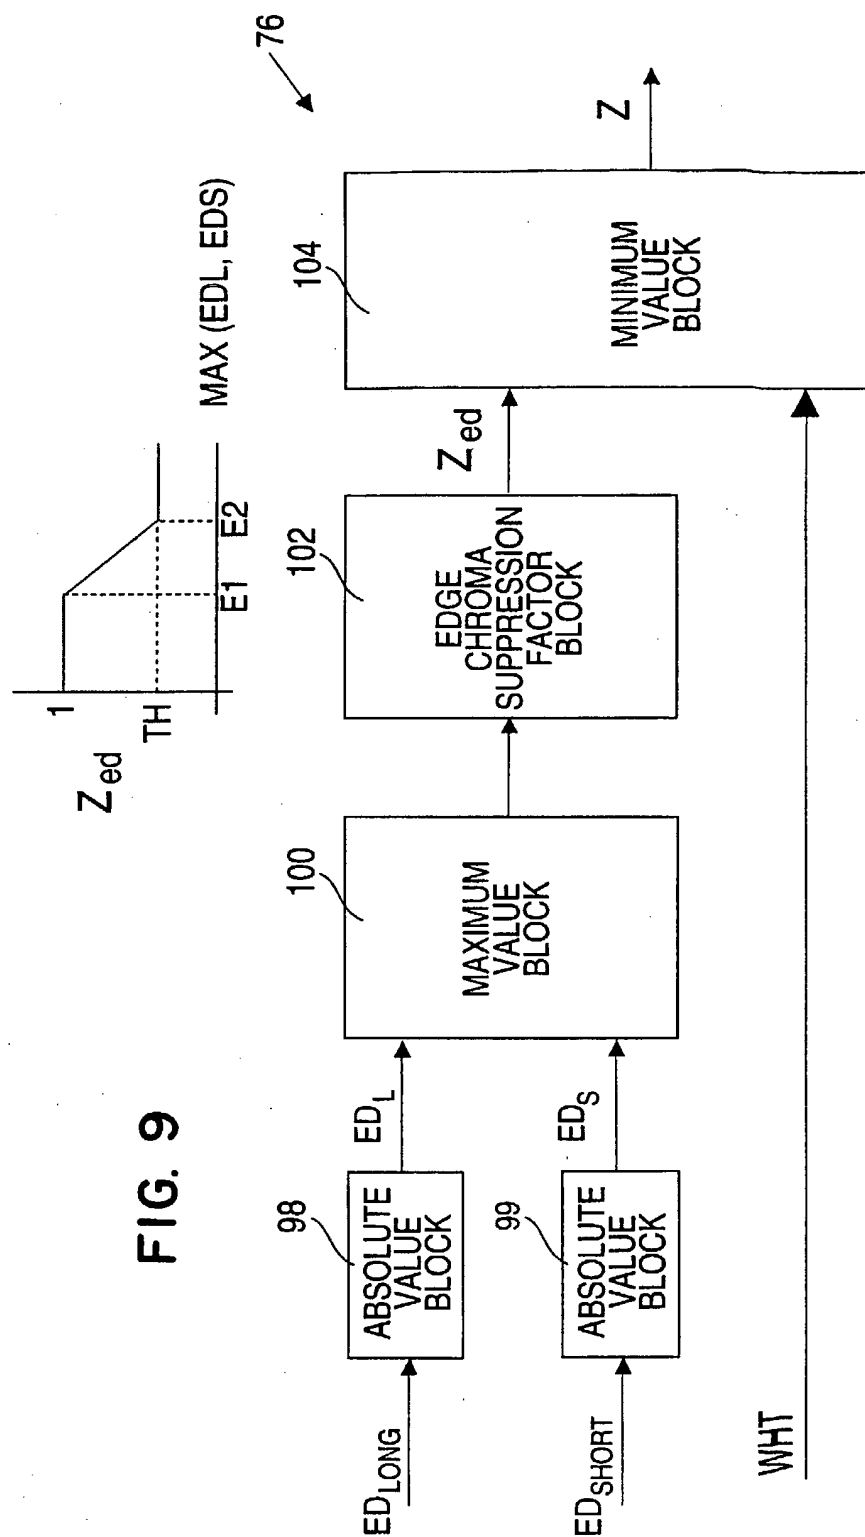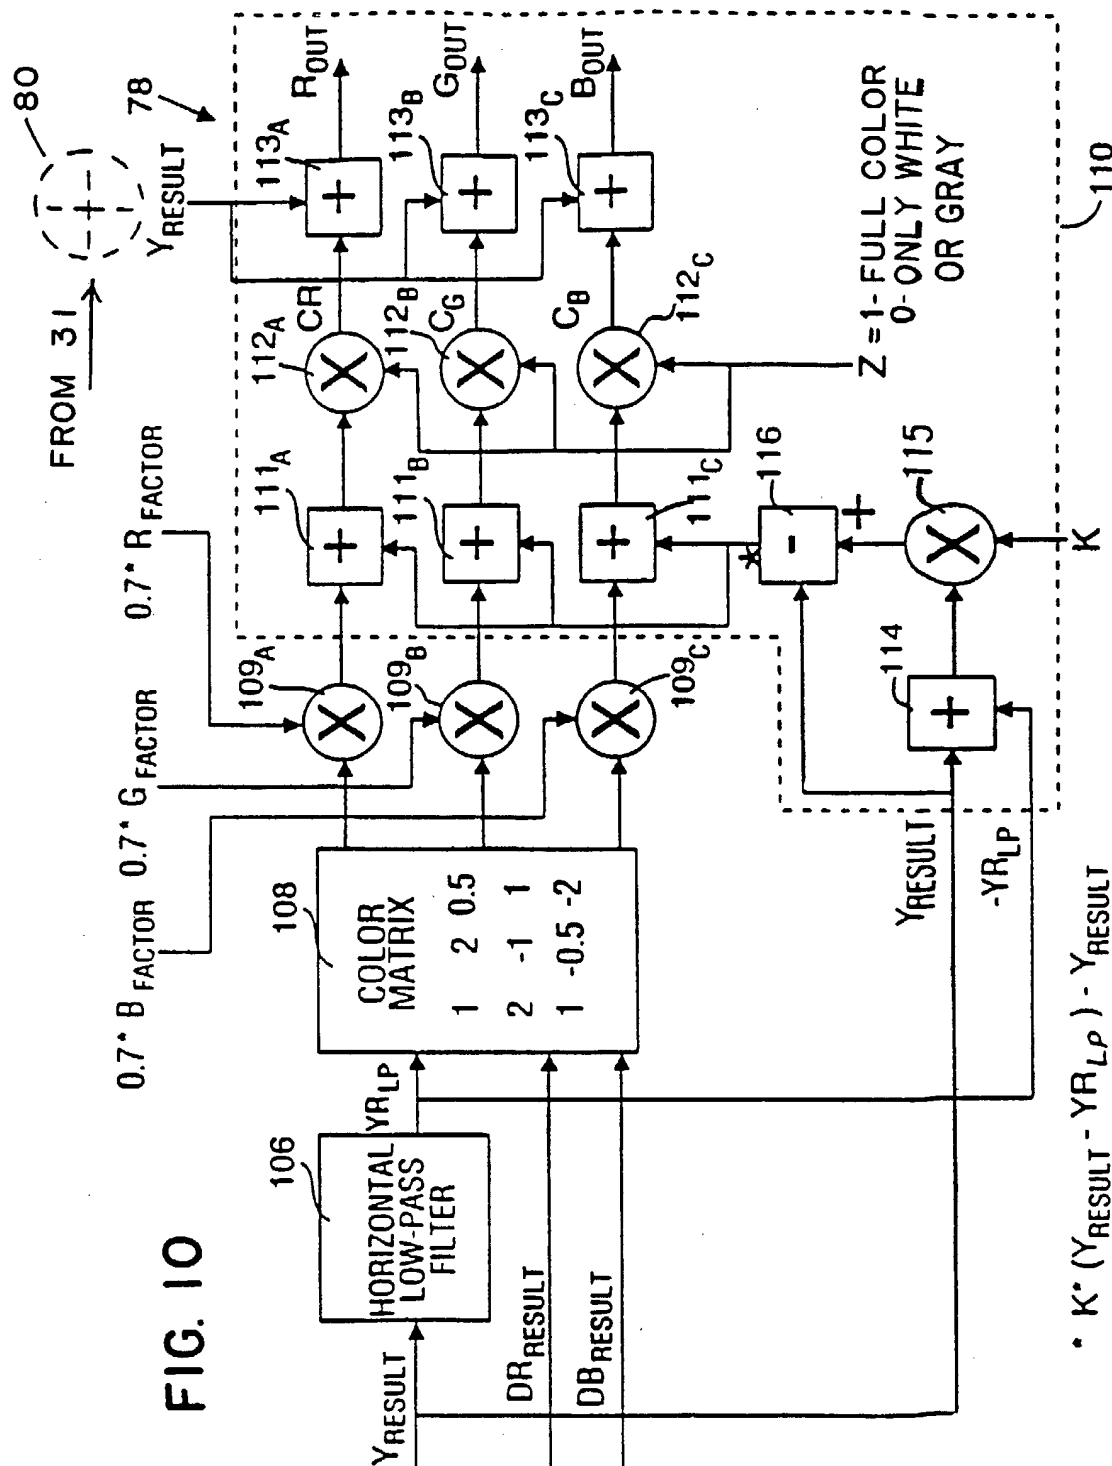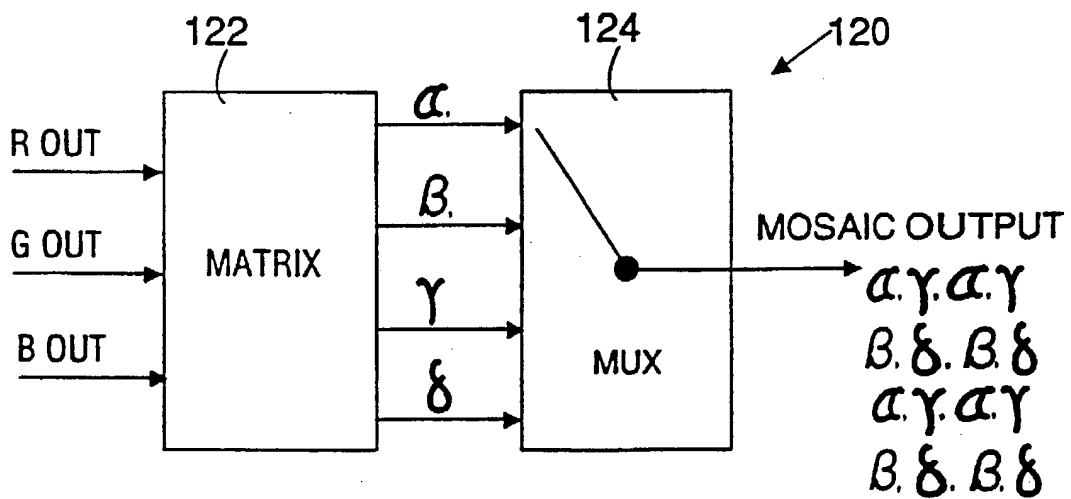
A.   CLASSIFICATION OF SUBJECT MATTER

IPC(5)   :H04N 9/07, 9/04, 5/228

US CL   :348/234, 276, 228, 253

According to International Patent Classification (IPC) or to both national classification and IPC

B.   FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. :   H04N 9/07, 9/04, 5/228

348/223, 228, 229, 234, 253, 266, 272, 279, 276, 362, 630

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

C.   DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,647,975 (ALSTON et al.) 03 March 1987, Col. 7, lines 49-64, Col. 1, lines 14-16, Col. 4, lines 1 and Col. 6, lines 35-38	1,18,19,20
Y	US, A, 4,614,966 (YUNOKI et al.) 30 September 1986, Figs. 2 and 13	1,4,5,18,19,20
Y	US, A, 4,774,564 (KONISHI) 27 September 1988, see entire document	9,19
A	US, A, 4,584,606 (NAGASAKI) 22 April 1986, see entire document	1-20
A	US, A, 5,138,458 (NAGASAKI et al.) 11 August 1992, see entire document	1-20

[X] Further documents are listed in the continuation of Box C.	[ ] See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be part of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
21 March 1994	**18 APR 1994**
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer SHERRIE HSIA
Facsimile No. NOT APPLICABLE	Telephone No. (703) 305-4738

Form PCT/ISA/210 (second sheet)(July 1992)★

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A, 4,858,014 (ZEEVI et al.) 15 August 1989 Whole Document	1-20
A	US,A,5,144,442 (GINOSAR et al.) 01 September 1992 Whole Document	1-20
A,P	US, A, 5,247,366 (GINOSAR et al.) 21 September 1993 Whole Document	1-20

Form PCT/ISA/210 (continuation of second sheet)(July 1992)*